



MANTUS MARINE



ENGINEERED IN
THE USA
TESTED WORLDWIDE

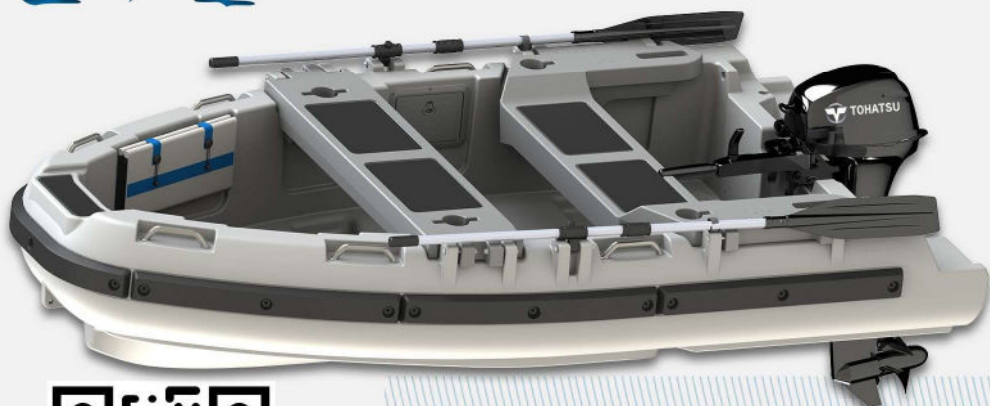

www.MantusMarine.com

M1 ANCHOR



MODEL-M1

DIGS LIKE NO OTHER

The Mantus Anchor is designed to penetrate dense grassy bottoms and set with unparalleled holding power. When tested, our anchors set faster and deeper than any other tested anchor, including Rocna, Manson Supreme, Bulwagga, Fortress, Bruce, CQR and Danforth anchors.

EASY TO STORE

The Mantus Anchor lineup simply has the best boat anchors available. Whether you are a long range cruiser, racing or going out for a day sail. The Mantus breaks down for easy storage, so you can store one or two as spares without taking up much needed boat space.

BUILT STRONG

Formed out of high quality steel plate. Contains no cast parts.

Shank and shank boot are welded from top and bottom.

ASTM certified bolts are oversized with a large margin to ensure safety.

Although the shank is attached to the fluke with 4 bolts, a single bolt has sufficient strength to handle the maximum expected load on the anchor.

Nose chisle shape is optimized to achieve maximum penetrating power.

Available in 316L Stainless Steel or Galvanized Steel.

Stainless Steel anchors feature a 2205 Duplex shank and 316L stainless steel fluke. The surface is hardened by shot-peening and then electro-polished to provide maximum corrosion resistance.

Sharp-headed nose is precision machined to achieve the perfect chisel shape to achieve maximum penetrating power.

Galvanized Steel anchor system is hot-dipped galvanized for corrosion protection.

Mantus Anchors offers a lifetime warranty on its boat anchors (however galvanization coat is warranted for 3 years).

Anchor Size	Day Anchor recommended for winds < 30 knots	Cruising Anchor recommended for winds < 50 knots	Storm Anchor recommended for winds > 50 knots
2.5 lbs	0-16 feet < 1,000 lbs		
8 lbs	16-20 feet < 3,000 lbs	0-14 feet < 1,000 lbs	0-12 feet < 800 lbs
13 lbs	20-25 feet < 5,000 lbs	16-20 feet < 3000lbs	12-16 feet < 1000 lbs
17 lbs	25-30 feet < 11,000 lbs	20-25 feet < 5000lbs	16-20 feet < 3000 lbs
25 lbs	30-35 feet < 15,000 lbs	25-30 feet < 11,000 lbs	20-25 feet < 5000 lbs
35 lbs	35-39 feet < 20,000 lbs	30-35 feet < 15,000 lbs	25-30 feet < 11,000 lbs
45 lbs	39-43 feet < 30,000 lbs	35-39 feet < 20,000 lbs	30-35 feet < 15,000 lbs
55 lbs	43-45 feet < 40,000 lbs	39-43 feet < 30,000 lbs	35-39 feet < 20,000 lbs
65 lbs	45-50 feet < 50,000 lbs	43-45 feet < 40,000 lbs	39-43 feet < 30,000 lbs
85 lbs	50-60 feet < 60,000 lbs	45-50 feet < 50,000 lbs	43-45 feet < 40,000 lbs
105 lbs	60-70 feet < 70,000 lbs	50-60 feet < 60,000 lbs	45-50 feet < 50,000 lbs
125 lbs	70-80 feet < 100,000 lbs	60-70 feet < 70,000 lbs	50-60 feet < 60,000 lbs
155 lbs	80-90 feet < 110,000	70-80 feet < 100,000 lbs	60-70 feet < 70,000 lbs
175 lbs	90-100 feet < 130,000	80-90 feet < 110,000 lbs	70-80 feet < 100,000 lbs

M2 ANCHOR



MODEL-M12

DIGS LIKE NO OTHER

The Mantus Anchor is designed to penetrate dense grassy bottoms and set with unparalleled holding power. Expect the Mantus Anchor to set every time the first time!

EASY TO STORE

The Mantus anchor lineup simply has the best boat anchors available. Whether you are a long range cruiser, racing or going out for a day sail. The Mantus breaks down for easy storage, so you can store one or two as spares without taking up much needed boat space.

BUILT STRONG

Formed from high quality steel plate and high end precision casting

ASTM certified bolts are oversized with a large margin to ensure safety

Although the bolt used in the assembly is load bearing, only a fraction of the load is transmitted to the bolt

Stainless Steel anchors feature a 2205 Duplex shank and 316L stainless steel fluke. The surface is hardened by shot-peening and then electro-polished to provide maximum corrosion resistance.

In the carbon steel version every part of the anchor system is hot-dipped galvanized for corrosion protection. (All shanks are HT ASTM 514 Steel and flukes are mild steel A36 equivalent)

Nose of the anchor is reinforced to guarantee a lifetime longevity

DESIGNED FOR FIT

Designed to fit boats with bow sprits and bow pulpits

LIFETIME WARRANTY

Mantus Anchors offers a lifetime warranty on its boat anchors (however galvanization coat is warranted for 3 years).

Anchor Size	Day Anchor recommended for winds < 30 knots	Cruising Anchor recommended for winds < 50 knots	Storm Anchor recommended for winds > 50 knots
8 lbs	16-20 feet < 3,000 lbs	0-14 feet < 1,000 lbs	0-12 feet < 800 lbs
13 lbs	20-25 feet < 5,000 lbs	16-20 feet < 3000lbs	12-16 feet < 1000 lbs
17 lbs	25-30 feet < 11,000 lbs	20-25 feet < 5000lbs	16-20 feet < 3000 lbs
25 lbs	30-35 feet < 15,000 lbs	25-30 feet < 11,000 lbs	20-25 feet < 5000 lbs
35 lbs	35-39 feet < 20,000 lbs	30-35 feet < 15,000 lbs	25-30 feet < 11,000 lbs
45 lbs	39-43 feet < 30,000 lbs	35-39 feet < 20,000 lbs	30-35 feet < 15,000 lbs
55 lbs	43-45 feet < 40,000 lbs	39-43 feet < 30,000 lbs	35-39 feet < 20,000 lbs
65 lbs	45-50 feet < 50,000 lbs	43-45 feet < 40,000 lbs	39-43 feet < 30,000 lbs
85 lbs	50-60 feet < 60,000 lbs	45-50 feet < 50,000 lbs	43-45 feet < 40,000 lbs
105 lbs	60-70 feet < 70,000 lbs	50-60 feet < 60,000 lbs	45-50 feet < 50,000 lbs
125 lbs	70-80 feet < 100,000 lbs	60-70 feet < 70,000 lbs	50-60 feet < 60,000 lbs
155 lbs	80-90 feet < 110,000	70-80 feet < 100,000 lbs	60-70 feet < 70,000 lbs
175 lbs	90-100 feet < 130,000	80-90 feet < 110,000 lbs	70-80 feet < 100,000 lbs

M QUICKCONNECT ANCHOR

STAINLESS STEEL

The Stainless Steel Quick Connect anchors are available in 3 sizes: 2.5 lbs, 8 lbs, 13 lbs. Mantus Quick Connect Anchors bring superb setting ability in all bottom types and outperform its competitors, even of much larger size. The stainless steel version is modular, it features detachable shank and roll bar for more compact storage. Designed to be used as kayak anchor, tender anchor or a stern anchor.

Anchor Size

Day Anchor recommended for winds < 30 knots

2.5 lbs

16-20 feet
< 3,000 lbs

8 lbs

20-25 feet
< 5,000 lbs

13 lbs

25-30 feet
< 11,000 lbs



THE BEST SETTING DINGHY ANCHOR

Stainless Steel Version is collapsible.

The shank easily slides into the fluke and needs only a single pin to lock.



MUIR

WINDLASSES



First class Tasmanian marine craftsmanship, born on the finish line of the Sydney to Hobart Yacht race and forged in the fierce Southern Ocean

VERTICAL WINDLASS

- Polished stainless steel components
- High tensile stainless steel shaft
- Heavy duty, marine grade, dual-direction motor
- Superior, heavy-duty Oil bath worm drive gearbox
- Rope Chain Management System (RCMS) fitted
- Integrated quick release with chain pipe cover
- Self-lubricating bush
- Capstan models feature a knurled grip
- Independent gypsy and capstan operation
- Suits multiple global chain standards
- Deck isolation pad



HORIZONTAL WINDLASS

- Brushed finished 316 stainless steel housing
- Polished stainless steel components
- High tensile stainless steel shaft
- Heavy duty, marine grade, dual-direction motor
- Superior, heavy-duty Oil bath worm drive gearbox
- Chain pipe & peeler
- Independent gypsy and capstan operation
- Front double twin footings
- Suits multiple global chain standards
- Deck isolation pad




M MANTUS D I N G H Y

THE MOST DURABLE DINGHY POSSIBLE
UNSINKABLE – LOW MAINTENANCE – LIGHT



**MODEL
104**

Mantus Dinghy is a solid rotomolded dinghy, that gives the stability and convenience of a rigid inflatable but offers better durability and long life of a rigid boat.

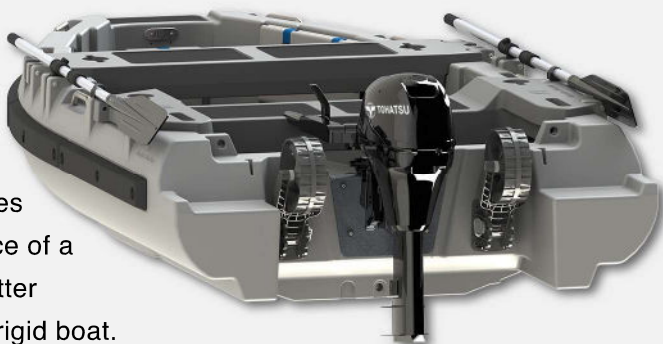

- Beam: 5.7 ft
- Height: 28"
- Length: 10.5 ft
- Weight: 220 lbs
- 4 Person Capacity
- Short Shaft Outboard Engine

RUGGED
BUILT TO LAST
MADE IN THE
USA 

M TOHATSU

MOTORS

20 HP TOHATSU

Sold only with dinghies – not sold separately

Boasting the honor of the lightest weight outboard in its class, Tohatsu's newly designed MFS 20hp Electronic Fuel Injection (EFI) is a great choice for a wide variety of boaters. Just because it is lighter in weight than our previous 20hp four stroke, doesn't mean this model won't deliver the same level of performance. This 20hp battery-less electronic fuel injection four stroke has exceptional torque and top end speed, with low vibration. We chose to build an EFI outboard because it has easy startup with no choke required and smooth, crisp acceleration throughout all RPM ranges. Another added benefit of an EFI versus our previous carbureted outboard is the fuel efficiency at wide open throttle, which allows you to go up to 50% farther on less fuel.



TOHATSU

Feel the Wind™



15 HP TOHATSU

Sold only with dinghies – not sold separately

The MFS15hp Electronic Fuel Injection (EFI) outboard represents a significant upgrade to the proven 15 hp model. As the lightest 4-stroke battery-less EFI 15 hp engine in the industry, it delivers an impressive power-to-weight ratio—one of the most critical factors for small horsepower outboards. This advanced design also offers reduced noise and vibration for a smoother, quieter ride. The EFI system ensures quick, reliable starts without the need for a choke, crisp acceleration across the full RPM range, and enhanced fuel efficiency at wide open throttle. Engineered for performance and reliability, the MFS15hp EFI is built to exceed expectations on the water.



M BOWROLLER

UNIVERSAL AND ELEGANT
CREATE THE PERFECT FIT

BR1

- Rugged 316 stainless steel construction with beautiful mirror polish.
- Slotted delrin rollers designed to align the chain before it enters the windlass to avoid chain skipping.
- Slotted roller housing allows for endless custom configurations to guarantee a perfect anchor fit.
- Universal fit for all anchor designs with two adjusting rollers facilitate a truly custom fit.
- Easily adopts to incorporate Anchor Guard to improve anchor fit.



BR2/BR3

- Universal fit for all anchor designs
- Channeled rollers stabilize the anchor on the bow roller
- Anchor locking mechanism integrated into the design
- Controlled angle of anchor deployment
- Adjustable rear roller facilitates a truly custom fit
- Easily adopts to incorporate Anchor Guard to improve anchor fit



MANCHOR GUARD

MANTUS ANCHOR GUARD

Get the perfect fit for your anchor

Anchor Guard guarantees your anchor a snug fit on your bow. Anchor fit on the bow is often a difficult problem to solve. Anchor Guard was designed to mate an existing bow roller with an anchor of any design. Simple install uses the same bolt that articulates your roller, and converts an existing bow roller into a custom bow roller for any anchor. The design incorporates: Sturdy 316L Stainless Steel Precision Casting, Polyurethane V-guard, and all 316L Fasteners.



*Available for both
port or starboard mount.*




STERN ANCHOR BRACKET

UNIVERSAL ANCHOR BRACKET

FREE UP SPACE, PUT THE ANCHOR ON THE RAIL.

- Have your emergency anchor fully rigged and ready to deploy!
- This universal bracket allows you to store an anchor of any design on the rail in the cockpit or on the bow
- The rollers adjust and allow you to customize the bracket to snugly secure the shank of any design
- The tight flitting rollers eliminate any movement, yet the anchor easily slides into the customized bracket
- Made from Polished 316L Stainless Steel

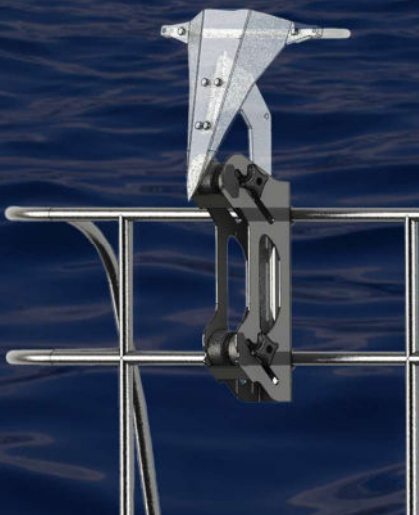

ACCOMMODATES MOST ANCHOR TYPES
FOR A DETAILED LIST, SEE BELOW

ANCHOR TYPE

FITS THIS SIZE AND SMALLER

MANTUS ANCHOR M1

45 LBS

MANTUS ANCHOR M2

25 LBS

FORTRESS

FX-37

MANSON SUPREME

35 LBS

ROCNA ORIGINAL

45 LBS

ROCNA VULCAN

25 LBS

DELTA

55 LBS

BRUCE

44 LBS

DANFORTH

35 LBS

MANCHOR SWIVEL

THE STRONGEST
LINK IN YOUR CHAIN



FEATURES

The strongest link – Mantus swivel is as strong as your HT chain.

Integrated shackle design completely eliminates side loading making this the safest swivel on the market.

Mantus swivel is the first to feature an oblong pin to maximize the pin strength, with the aid of computer modeling and physical testing we truly created a swivel that is the strongest link.

316L stainless steel body, 2507 duplex pin, 2205 duplex shackle.

THREE SIZES AVAILABLE

Swivel Model

US1

1/4 inch (6mm) all grades

5/16 inch (8mm) grade 30, 40 HT chain

Swivel Model

US2

5/16 inch (8mm) grade 70 HT chain

3/8 inch (10mm) grade 30, 40 HT chain

Swivel Model

US3

3/8 inch (10mm) grade 70 HT chain

7/16 inch (11mm) grade 30, 40 HT chain

1/2 inch (12mm) grade 30, 40 HT chain



MANTUS

CHAIN & LINE

DUPLEX STAINLESS STEEL CHAIN

Cromox Duplex Stainless Steel Chain is made from 318 LN Stainless Steel and is made to a Grade 60 Standard. Cromox Chain is available in G4 dimensional standard for most US made boats and DIN 766 the most common metric chain standard.

Size (in)	Weight per foot	Breaking Strength (lb)	Wire Diameter (in)	Inside Length (in)	Inside Link Width (in)
1/4	0.74	11025	0.274	0.85	0.41
5/16	1.21	17635	0.33	1.03	0.51
3/8	1.48	22045	0.399	1.22	0.59
1/2	2.55	36815	0.51	1.59	0.76
5/8	3.83	52,910	0.63	1.79	0.9

GALVANIZED CHAIN

Laclede – Hot-Dip Galvanized Chain is a USA Made Chain with a 100 micron thick minimum Galvanization Finish. Made to a Grade 43 Hi Test Standard

Size (in)	Weight per foot	Breaking Strength (lb)	Wire Diameter (in)	Inside Length (in)	Inside Link Width (in)
1/4	0.74	7800	0.274	0.85	0.41
5/16	1.21	11700	0.33	1.03	0.51
3/8	1.48	16200	0.399	1.22	0.59
1/2	2.55	27600	0.51	1.59	0.76
5/8	3.83	39000	0.63	1.79	0.9



M MANTUS

ANCHOR ROPE

AMERICAN MADE 8-STRAND PLAITED ROPES

We believe that 8 Plait polyester is the best choice for anchor rope, and Buccaneer Rope Company makes a premium product



BUCCANEER
rope company

MATERIAL: POLYESTER

Polyester offers higher strength, better abrasion resistance and better UV resistance than nylon. Polyester rope does have less stretch than nylon but when used in longer lengths (> 50) feet, it has adequate stretch to absorb the shock loading from waves and wind gusts. If anchor rope is a chain-line hybrid, and the conditions require deploying line rope in addition to the chain, we recommend deploying ≥ 50 feet of line to make sure you have adequate shock absorption.

BRAID/PLAIT: 8 STRAND

8-strand braid is generally smoother and less prone to twisting or kinking, making it easier to store and deploy.

The braided construction of an 8-strand line reduces the likelihood of the rope becoming tangled or twisted when stored.

BRAID/PLAIT: 8 STRAND

Have a unique setup or specific requirements? We offer custom splicing for all your rope needs. Whether you need a snubber, bridle, or something entirely your own, our skilled team can create a solution tailored just for you. Call us or email our splicing experts to discuss your project—we'll work with you to design and build the perfect fit.





SINGLE LEG SNUBBER

- Strong and Durable
- Designed to absorb the shock load from wind gusts and waves
- Employs chafe protection to all areas exposed to rubbing
- Uses heavy duty 316L stainless steel thimbles
- Mantus Chain Hook/Grabber sized for your chain



Bridle Size	Small	Medium	Large
Boat Size	30-40 feet	40-50 feet	50-70 feet
Rope: Three Strand Nylon Diameter	5/8" SWL 1525 lbs UBS 12,200 lbs	3/4" SWL 2087 lbs UBS 16,700 lbs	1" SWL 3675 lbs UBS 29,400 lbs
Snubber Length	23 feet	26 feet	30 feet
Thimble 316 SS Heavy Duty	5/8" heavy duty	3/4" heavy duty	1" heavy duty
Mantus Chain Hook	Size to Fit Chain	Size to Fit Chain	Size to Fit Chain

M BRIDLE

MANTUS BRIDLE SYSTEM

Introducing the Mantus Marine Bridle/Snubber System:

- Strong and Durable
- Designed to absorb the shock load from wind gusts and waves
- Employs chafe protection to all areas exposed to rubbing
- Uses heavy duty 316L stainless steel thimbles
- Mantus Chain Hook/Grabber sized for your chain
- For a proper mooring ball attachment please take a look at the Mantus Mooring Snap Shackle.

Universal Bridle

Designed for use with bow cleats



Catamaran Bridle

Designed for use with bow eye-bolts



RECOMMENDED SIZING GUIDE

Bridle Size	Small	Medium	Large
Boat Size	30-40 feet	40-50 feet	50-70 feet
Rope: Three Strand Nylon Diameter	5/8" SWL 1525 lbs UBS 12,200 lbs	3/4" SWL 2087 lbs UBS 16,700 lbs	1" SWL 3675 lbs UBS 29,400 lbs
Bridle Length Overall	23 feet	26 feet	30 feet
Individual Leg Length	20 feet	22 feet	26 feet
Thimble 316 SS Heavy Duty	5/8" heavy duty	3/4" heavy duty	1" heavy duty
Forged 2205 Duplex SS Shackles (with Catamaran Bridles)	7/16" S0116-FS12	1/2" S0116-FS13	5/8" S0116-FS16
Mantus Chain Hook	Size to Fit Chain	Size to Fit Chain	Size to Fit Chain
Recommended Mooring Snap Shackle	1/2"	1/2"	5/8"

M MOORING SHACKLE

ATTACH A BOAT TO A MOORING BALL

Mooring Snap Shackle is designed to easily and securely attach a boat to a mooring ball. Simply load the mooring line or the metal ring into the snap shackle, close the gate and lock the pin. Our Snap Shackle features a locking pin to ensure the gate stays locked once secured. We believe this is the strongest and the smartest way to moor your boat.

Made from 2205 Duplex Stainless Steel to be stronger and more corrosion resistant.

Features a proprietary secondary pin locking mechanism that ensures the gate stays closed

Currently available in 1/2 inch and 5/8 inch version



MOORING SNAP SHACKLE SIZING TABLE

Snap Shackle Size	Anchor Shackle Size	Recommended Chain Size	Recommended Anchor Line Sizes	Snap Shackle Breaking Strength
1/2 inch	1/2 inch	Up to 3/8 inch (10mm)	1/2 inch - 3/4 inch (12mm - 20mm)	7.4 T
5/8 inch	5/8 inch	Up to 1/2 inch (13mm)	3/4 inch - 1 inch (20mm - 25mm)	10T

M CHAINHOOK

MANTUS M3 CHAIN HOOK Stronger, More Compact, More Versatile


The M3 Chain Hook, or chain grabber securely latches to the chain even when chain is unloaded, making it much safer than standard chain hooks that often fall off.

The M3 Hook is made from 2205 Duplex Stainless Steel designed to survive in a harsh marine environment and is still the strongest chain hook on the market.

Ideal for use with a snubber or a bridle.

Fits BBB, Proofcoil, Hi Test and Stainless Chain.

Available for 1/4 inch / 6mm, 5/16 inch/ 8mm, 3/8 inch/10mm, 1/2 inch/12mm , 5/8 inch chain/ 14mm.

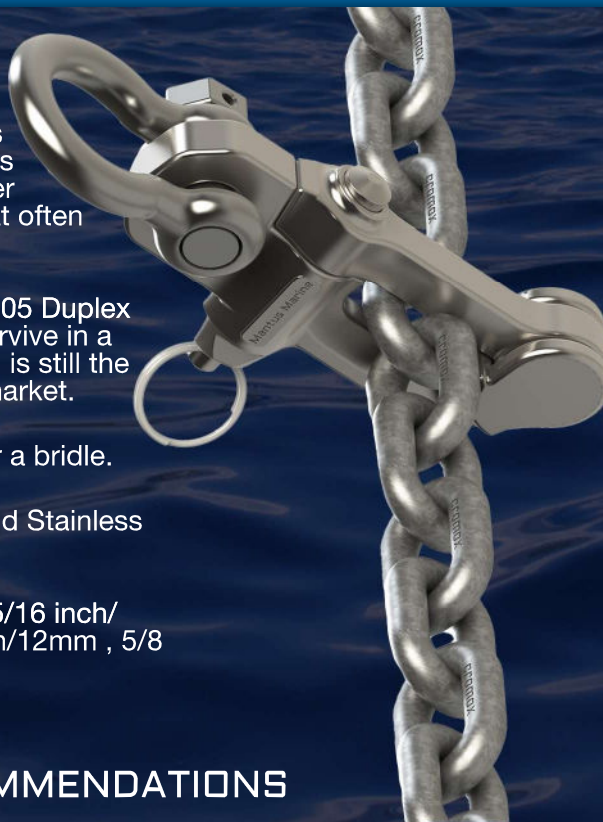

HOOK SIZING RECOMMENDATIONS

Hook Size	UBS	Shackle Size	Recommended Snubber Rope
M3CH1 1/4 in (6-7 mm)	10,028 lbs	7/16 in Shackle	1/2 in – 5/8 in
M3CH2 5/16 in (8 mm)	13,376 lbs	1/2 in Shackle	5/8 in – 3/4 in
M3CH3 3/8 in (10 mm)	19,214 lbs	5/8 in Shackle	3/4 in – 1 in
M3CH4 1/2 in (12-13 mm)	32,993 lbs	5/8 or 3/4 in	1 in – 1 1/4 in

MANTUS SNUBBER PENDANT

Mantus Snubber Pendant is designed to attach the snubber line to chain/or line rode. It is made from UHMWPE fiber (Ultra high molecular weight polyethylene fiber) material known to be size for size as strong as steel.

Use as Snubber Attachment:

While many sailors use chainhooks to attach snubber to chain others prefer to tie a rolling hitch directly onto the chain rode. The advantage of Mantus Snubber Pendant is that it is easier to tie and much easier to remove after any significant loading, further **the Snubber Pendant can be used on line rode** as well by simply tying a 3 pass prusik knot, thus smaller boats that have mostly line anchor rode can still attach the bridle using the Snubber Pendant.

The Snubber Pendant is really useful when it is necessary to offload a line under load. A simple 3 pass prusik knot should be used for attachment. Removal is real easy even after > 1000 lbs loading.

All pendants include an appropriately sized 2205 duplex stainless steel shackle


Pendant Size (Line Diameter)	Shackle Size	Recommended for Following Chain Size	Pendant Strength UTS as used with two legs
5 mm	7/16 inch	5/16 inch (8-8 mm)	12,000 ft. lb
8 mm	1/2 inch	3/8 inch (10 mm)	23,000 ft. lb
10 mm	5/8 inch	1/2 inch (12 mm)	32,300 ft. lb



ANCHOR BUNGEE

Offload your Windlass
Secure the anchor underway

Fits 1/4", 5/16",
3/8", 7/16" chain

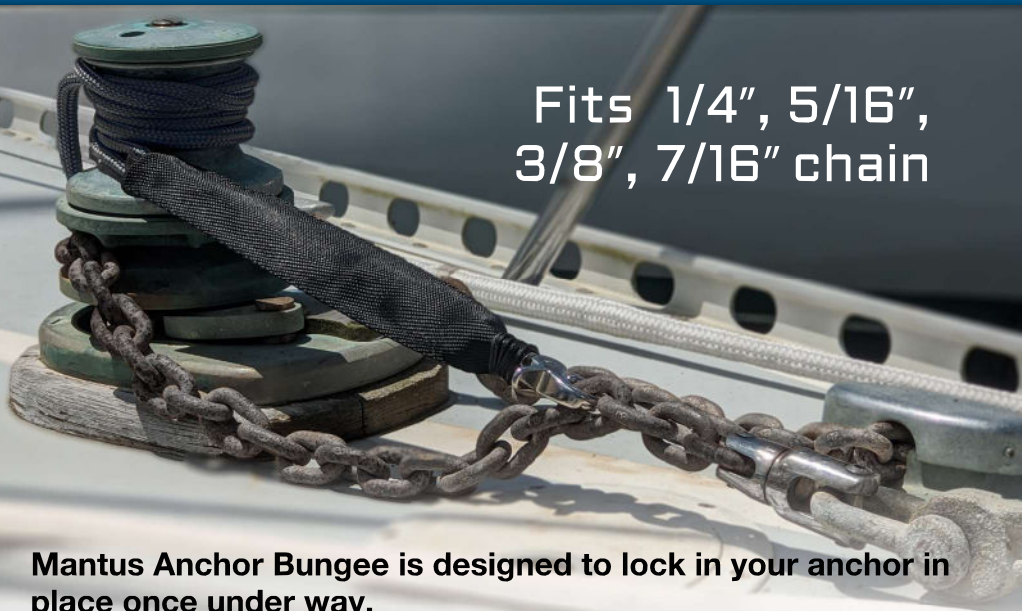

Mantus Anchor Bungee is designed to lock in your anchor in place once under way.

The product features 10 mm double braid line spliced into an elastic tensioner and a stainless steel chain hook to capture the chain.

Three easy steps will get your anchor tied off and tensioned:

- 1) Secure the stainless steel hook to your chain
- 2) Put the line over the cleat and tighten the line, the rubber bungee will aid in maintaining tension on the anchor rode
- 3) tie off the line to the cleat



M SNAP-ON LIGHT

FEATURES

- Automatic on nightmode.
- Rechargeable led light that SNAPS to the rail
- Warm LED light designed to give a cozy feel.
- Red LED light to aid with night navigation.
- SOS Flashing Mode.
- Charging Station for Mobile Devices.
- Battery indicator light displays the battery level and charging status.
- IPX7 water resistance ensures a long life on your boat.
- USB C – IN port for easy recharging and USB – OUT port used to charge mobile devices.
- Comes in your choice of 7/8", 1" or 1 1/4" clamp sizes

M HEADLAMP

DESIGNED FOR LIFE
ON THE WATER



FEATURES

- Rechargeable via USB
- Water Proof IPX8 10 meters (30 feet)
- Head Lamp + Wrist light + Emergency Beacon
- Red Light for night navigation

SETTINGS

1. Red mode for night navigation (25 hrs)
2. Low setting light 150 lumens (8.3 hrs)
3. High beam 770 lumens (2.5 hrs)
4. Emergency SOS mode (20 hrs)



MANTUS NAVIGATION LIGHT



Features

USB and Solar Charging
USCG Approval, 2 Nautical Miles
Water Resistant IPX8

TRI COLOR LIGHT 5 MODES OF OPERATION

360 deg tricolor light
225 deg bicolor light
112.5 deg red side light
112.5 deg green side light
135 deg white stern light



WHITE COLOR LIGHT 5 MODES OF OPERATION

360 all around white light
135 deg white stern light
225 deg masthead light
360 Flashing SOS
Dim 360 white light 1/5th
max luminosity – (not to be
used for navigation)



RAILCLAMP

MOUNT ANYTHING

Designed to easily mount and dismount
items to/from the rail.

Fits rail sizes 7/8" - 1/4"

Mount solar panels, speakers, lights,
navigation equipment and much more
with the ease of a simple SNAP

Interfaces with RAM accessories

316 Stainless Steel



M SCUBA

SCUBA PACK

Mantus Scuba System is designed to be compact, light and portable. Everything fits into a backpack (included) so you can have SCUBA GEAR with you on every adventure. It is an ideal system for cruisers. The small profile tanks fit easily into small places on the boat and allow you hassle free diving for all your underwater projects. Feel the freedom of movement of a free diver but do it with SCUBA GEAR.



SCUBA HARNESS

Lightweight Scuba Tank Harness, designed for the small tanks. Accommodates: 2 - 4 liter tanks.

SCUBA SPARE TANK

Compact 3.5 liter tank (24 Cu Ft) is only 17 inches tall and 5.25 inches diameter – sufficient for approximately 30 min dive time at 30 feet or 1 atm.



WET GEAR BACK PACK

Features 50 liters of storage space, large removable drain plug to allow the water to drain and the contents to breathe. Made from water proof material so dry gear is protected in the rain. A side pocket offers a zippered water proof compartment for to store smaller items, finally bungee cord pocket allows for more external storage.

M SCUBA COMPRESSOR

THE MOST PRACTICAL PORTABLE COMPRESSOR IN THE WORLD

The most practical portable compressor in the world. Compact, light weight and completely marinized (all components made to survive in the marine environment) The compressor is powered by a 110V electric motor that draws 13 amps max. This guarantees you can use it anywhere there is an outlet or power it by a small generator.

Available in 110v (12 amps) and 220v (6 amps) options. Marinized, Features Auto Shut off and water cooling.

- Operating Pressure 200 Barr
- Fill Rate 35 lit/min
- Noise Level - 75 db
- Electric Motor Voltage 110V,
- Current draw 13 ams (max)
- Weight 69 lbs / 31 kg
- Dimensions:

H: 19in W: 15 in L: 29 in

H: 38cm W: 48cm L: 50cm



M JAWSLIDE

BUILD YOUR BIMINI TOP OR A DODGER WITH A SIMPLE SNAP



Clamp – on Jaw Slide

For Mantus Stainless Steel Rail Clamp

Allows for a quick assembly and disassembly of bimini top, dodger, grip handles and much more

Polished 316 Stainless Steel

Requires an appropriate sized Mantus Stainless Steel Rail Clamp

(Fasteners and glue included)

M MANTUS R O P E C L I P

ORGANIZE YOUR LINES
ON THE RAIL WITH
A SIMPLE SNAP

- Mounts easily on the rail using our snap on rail clamp
- Easily move the location of where lines are stored
- Can be mounted on vertical or horizontal tubing
- Available for: 7/8 inch (22 mm), 1 inch (25 mm), 1 1/4 inch (32mm) rail



M SHACKLE

STAINLESS STEEL ANCHOR SHACKLE DESIGNED FOR THE JOB

A flush hex head allows for smooth passage through the bow roller, while a socket wrench or an adjustable wrench could be easily used to open or close the pin even after many months of use. A hole in the hex head is designed to safety wire the pin to prevent pin loosening.




1/4, 5/16, 3/8 inch shackles are forged and use high quality 316 stainless steel. 7/16, 1/2, 5/8 inch are forged and use high quality duplex 2205 stainless steel for extra strength and corrosion resistance.

M UNIVERSAL KEY

UNIVERSAL DECK FILL LID KEY

Mantus Universal Deck Key is a multifunctional tool that opens all types and sizes of deck fill lids, and shackles. The tool is truly universal, intuitive, easy to use and comfortably fits in your pocket.

Mantus Universal Key is a 316L stainless steel precision investment casting so it will not corrode or wear with time. Its the one tool every boat needs

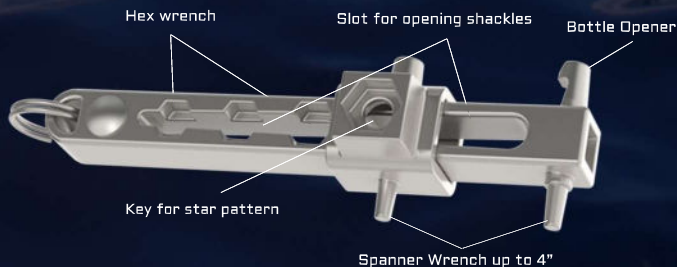

M MANTUS MARINE



WITHIN THE US: Toll free 1-855-262-6887
BEYOND THE US: 469-878-4083

info@mantusmarine.com
Facebook: Mantus Marine

8820 Frey Rd, Houston TX 77034



www.MantusMarine.com